# imageRUNNER
## 2206N | 2006N | 2206

## READY FOR BUSINESS.
## PRINT FAST, PRINT SAFE.

DESIGNED FOR SMALL
AND MEDIUM BUSINESSES

# Canon
## Delighting You Always

**iR2206**
22PPM. Simple. Fast.

**iR2006N**
20PPM. Secure Print. Connectivity.

**iR2206N**
22PPM. Secure Print. Connectivity.

**Business Can** Be Simple

# THE imageRUNNER 2206/2006 SERIES

The imageRUNNER 2206/2006 Series comprises of three models, iR2206N and 2006N (standard models) and iR2206 (entry model). imageRUNNER 2206N, 2006N support secure printing and Printer Command Language (PCL), and aim to improve convenience through the Send Lite function. The entry model is robust with basic functions, while the standard models support Wi-Fi and mobile printing by the use of CANON PRINT Business, Mopria, Google Cloud Print and more. These models boast improved durability and reliability in harsh environments, such as under conditions of high air temperature and humidity.

## TAKE CONTROL OF YOUR JOB OPERATIONS

- Touch Panel provides ease of use and reduces operational steps
- Customizable Home screen
- Improved screen visibility for Touch Panel with the use of backlight
- Up to 13 languages* supported

*Supports Malay, Thai, Vietnamese & more

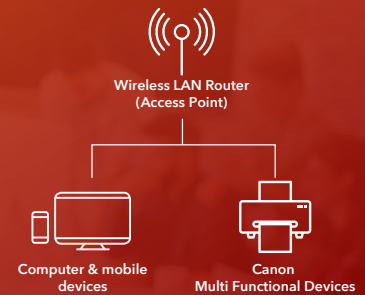## COPY ID CARDS EFFORTLESSLY

- One-touch shortcut key makes copying of ID cards onto a single printout simple and efficient.

- Shortcut setup for ID card copy is not required

# ENJOY MORE VALUE WITH imageRUNNER 2206N/2006N

## ((·)) WIRELESS LAN

Built-in with Wi-Fi capability, the imageRUNNER 2206N/2006N can connect wirelessly to a network via an access point. All other connected electronic devices on the same network will be able to print wirelessly, thereby providing greater convenience to users.

Wireless LAN Router
(Access Point)

Computer & mobile
devices

Canon
Multi Functional Devices

## SECURE PRINTING

Protect confidential information from your documents by securing your print job with a configurable PIN.

Documents are held in the printer and released only when a PIN is entered. With the additional layer of verification, this eliminates security risks when printouts are left unattended. It also indirectly reduces paper wastage in the event of a misprint.

## SEND LITE

- **Scan to Email:** Scan your original documents through the platen or automatic document feeder (ADF) and send the scanned document as an attachment to multiple email addresses.

- **Scan to SMB:** Scan your original documents through the platen or automatic document feeder (ADF) and store your files in the network folder via SMB protocol.

- **Au-Send:** Send function is available only to authenticated users, deterring various types of potential data leakages.

## MOBILE PRINTING

- Supports businesses with mobile printing for a variety of file formats including image files, *PDF, *Microsoft Office files and web pages.

- **Canon PRINT Business:** Free download from App Store (iOS) and Google Play (Android)

## SERIES LINE-UP

| Model | Copy Speed | Network Print | Scan | Send Lite | WiFi | Dept ID | Platen Cover | DADF | Duplex | Max. Paper Cassette |
|---|---|---|---|---|---|---|---|---|---|---|
| iR2206N | 22ppm | ✓ | Push / Pull | Send to email/ SMB | ✓ | ✓ | Opt | Opt | Opt | 2 x 250 sheets (80gsm) |
| iR2006N | 20ppm | ✓ | Push / Pull | Send to email/ SMB | ✓ | ✓ | Opt | Opt | Opt | 2 x 250 sheets (80gsm) |
| iR2206 | 22ppm | ✗ | Push / Pull | ✗ | ✗ | ✗ | ✓ | ✗ | ✗ | 1 x 250 sheets (80gsm) |

# SPECIFICATIONS

| GENERAL SPECIFICATIONS | | | iR2206 | iR2006N | iR2206N |
|---|---|---|---|---|---|
| Type | | | A3 Monochrome Multifunctional Device (Reader/Printer Desktop) | | |
| Copy/Print Speed | A4 | | 22ppm | 20ppm | 22ppm |
| | A3 | | 11ppm | 10ppm | 11ppm |
| Warm-Up Time (Time from device power on, until copy ready) | | | 13 secs or less | | |
| Recovery from sleep mode | | | 4.3 secs | | |
| First Copy Time (A4) | | | 7.4 secs | | |
| Memory | | | 256 MB | 512 MB | |
| Dimensions (W x D x H) | | | 622 x 589 x 499 | 622 x 606 x 600mm (with ADF) | |
| Weight | | | Approximately 28.7Kg | Approximately 35.5 kg (with ADF) | |
| Installation Space (W × D) | | | 920 x 589 mm (when multi purpose tray is extended) | | |
| Power Supply | | | 220 to 240 V AC, 50/60 Hz, 2.4 A | 220 to 240 V AC, 50/60 Hz, 2.7 A | |
| Max Power Consumption | Maximum Power Consumption: | | 1.5 kWh | | |
| | When the machine is in the Sleep mode: | | 2 W | | |
| Toner Yield (A4, 6% coverage) | | | Approx 10,200 sheets (A4, 6% coverage) | | |
| Drum Yield | | | Approx 66,000 sheets | Approx 63,700 sheets | Approx 66,000 sheets |

| PRINT SPECIFICATIONS | | | | | |
|---|---|---|---|---|---|
| Print Resolution | | | 600 x 600 dpi | | |
| Page Description Language(s) | | | UFRII LT (Standard) | UFRII LT (Standard), PCL6 (Optional) | |
| Print OS Compatibility | | | Windows 10/ 8.1/ 7, Windows Server 2008/ 2008 R2/ 2012/ 2012 R2/ 2016, Mac OS X 10.9.5 or later | | |
| Interface | Network | | N/A | Ethernet 100Base-Tx/10Base-T (IEEE 802.3 compliant), WLAN IEEE 802.11b/g/n | |
| | Others (Local Print/Scan) | | USB2.0 x 1 | | |
| Network Protocol | | | N/A | TCP/ IP (IPv4/IPv6), USB ;Frame type: Ethernet II, Print applications: LPD/ Raw/ IPP / IPPS/ WSD/ Mopria/ Google Cloud Print/ AirPrint/ Windows10 Mobile Print | |

| COPY SPECIFICATIONS | | | | |
|---|---|---|---|---|
| Copy Resolution | | 600 x 600 dpi | | |
| Multiple Copies/Prints | | Up to 999 copies | | |
| Magnification | | 25% - 400% (1% increment) | | |

| SEND SPECIFICATIONS | | | | |
|---|---|---|---|---|
| Destination | | N/A | Scan to Email (SMTP), network folders (SMB) | |
| Scan Speed (Simplex, A4, 300 dpi) | | N/A | BW: 13 sheets/ minute, CL: 6 sheets/ minute | |
| Address Book | | N/A | LDAP (5)/Local(104) / One-touch(4) | |
| SEND Resolution | | N/A | BW/CL 300 x 300 dpi | |
| SEND File Format | | N/A | PDF/ Compact PDF/ JPEG/ TIFF | |

| SCAN SPECIFICATIONS | | | |
|---|---|---|---|
| Destination | | MF Scan Utility, application compatible with TWAIN/WIA | |
| Supported Protocol | | TCP/ IP, USB | |
| Scan Speed (Platen, A4, 600 dpi) | | BW: 1.71 secs, CL: 3.42 secs | |
| Scan Speed (Simplex, A4, 300 dpi) | | BW: 23 sheets/ minute, CL: 12 sheets/ minute | |
| Scan Resolution | | BW: 600 x 600 dpi, CL: 300 x 600 dpi | |
| Scan File Format | | TIFF/ JPEG/ PNG/ PDF (Compact, Searchable) / PDF (Divided into Single-Page Files) | |
| Scan OS Compatibility | | Windows 10/ 8.1/ 7, Windows Server2008/ 2008 R2/ 2012/ 2012 R2/ 2016, Mac OS X 10.9.5 or later | |

| SECURITY | | | |
|---|---|---|---|
| Authentication | | N/A | Department ID management (Max: 100 IDs) |
| Network | | N/A | Standard: IP/Mac Address Filtering, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP |
| Document | | N/A | Secure Print |

| PAPER HANDLING | | | | |
|---|---|---|---|---|
| Paper Sizes | Casette 1 | | A3, B4, A4R, A4, B5, B5R, A5R, India-LGL, FOOLSCAP | |
| | Cassette 2 | | - | A3, B4, A4R, A4, A5, B5, B5R |
| | Multi Purpose Tray | | A3, B4, A4R, A4, B5, B5R, A5, A5R, India-LGL, FOOLSCAP, Envelope (COM 10, Monarch, ISO-C5, DL) | |
| Paper Input Capacity (Standard) | Cassette 1 | | 250 sheets (80gsm) | |
| | Multi Purpose Tray | | 80 sheets (80gsm) | |
| Paper Input Capacity (Optional) | Cassette 2* | | N/A | 250 sheets (80 gsm) |
| Paper Specification | Cassette | | Weight: 64 - 90gsm , Type: Plain (64 to 90gsm), Recycled (65 to 80gsm), Colour (64 to 80gsm), Pre-punched (75 to 80gsm) | |
| | Multi Purpose Tray | | Weight: 60 - 128gsm; Type: Plain (64 to 90gsm), Heavy 1 (91 to 105gsm), Heavy 2 (106 to 128gsm), Recycled (65 to 80gsm), Colour (64 to 80gsm); Pre-punched (75 to 80gsm), Bond (75 to 90gsm), Transparency, Label, Envelope | |

| OPTIONAL ACCESSORIES DUPLEX AUTOMATIC DOCUMENT FEEDER - AY1* | | | | | |
|---|---|---|---|---|---|
| Type | | | N/A | Automatic Document Feeder | |
| Size of Originals | | | N/A | A3, B4, A4, A4R, B5, B5R, A5, A5R, FOOLSCAP, India LGL | |
| Paper Weight | | | N/A | When scanning continuously: 52 to 105g/m2 When scanning a single original: 37 to 128g/m2 | |
| Max. Number of Originals | | | N/A | 50 sheets (A4, 80gsm) | |
| Scanning Speed (Simplex) | Copying (A4 in BW at 600 dpi) | | N/A | 20 ipm | 22 ipm |
| | Scanning (A4 in BW 300 dpi) | | N/A | 23 ipm | |
| Dimensions (W x D x H) | | | N/A | 565 x 520.5 x 126 mm | |
| Weight | | | N/A | Approximately 7.0 kg | |

## OTHER OPTIONAL ACCESSORIES AND SUPPLIES

Duplex Unit-C1*, Platen Cover Type X*, Cassette Feeding Module – AD1*, FL Cassette-BB1*, Heater Kit-M2, Cassette Heater Unit-40, NPG-59 Drum Unit, NPG-59 Black Toner
*Available for iR2206N/2006N only.

DEALER'S STAMP