

XEED

MULTIMEDIA PROJECTOR

Canon

Delighting You Always



REALITY COMES REIMAGINED IN 4K CLARITY

Canon XEED 4K600STZ is designed to present stunning projections wherever the venue. Mastered in Native 4K clarity, colour range and fidelity are perfected in cutting-edge laser light technology. Its uncompromised quality comes compact in size, ready to deliver lasting impressions with any content.




XEED 4K600STZ
MULTIMEDIA PROJECTOR

4K
4096 x 2400

LASER
UP TO 20,000 HOURS
OR MORE

4K

NATIVE 4K RESOLUTION



At 4096 x 2400, images become incredibly detailed and more impactful. Up to 4 times the resolution of Full HD, audiences are closer than ever to the reality with a wider depth-of-field. Ideal for presentations, galleries and even military simulators.

LASER

VIVID IN LASER LIGHT



Canon 4K600STZ projector uses laser light source for a wider spectrum of deep, captivating colours to deliver true-to-life experiences. Laser light is also highly efficient, lasting up to 20,000 hours with little to no downtime.

PROJECTOR SPECIFICATIONS

PROJECTION SYSTEM	Imaging Device	0.76" LCOS Panel x3
	Aspect Ratio	17:10 Approx. (128:75)
	Native Resolution	4096 x 2400
	Brightness	6,000 ¹ / 4,800 / 3,000 Lumens ²
	Contrast	10,000:1 (Dynamic Contrast Function) / 4,000:1 (Native) (All White:All Black) ³
	Image Size	40 – 600" (4096 x 2400)
	Digital Keystone	V ± 20°, H ± 20°
UNIFORMITY	F Number, Focal Length	F 2.6, f=17.2 – 22.3 mm
	Zoom Ratio	1.3x
	Throw Ratio	1.0:1 – 1.3:1
	Focus	Powered
IMAGE ADJUSTMENTS	Lens Shift	V: ± 60%, H: ± 10% (Powered)
	Image Mode	Standard / Presentation / Dynamic / Photo / sRGB / Video / DICOM SIM / User 1 / User 2 / User 3
	Colour Adjustment	Colour Level, Colour Balance, Colour Temperature, Gain (R, G, B), Offset (R, G, B)
	Screen Colour Correction	Normal / Greenboard / Adjust (Custom)
	Mounting	Omnidirectional ⁴
TERMINALS	Adjustable Feet	Four locations at bottom. Extension length = 0.59"
	DVI-D	Digital PC Input (x4)
	HDMI 2.0a	Digital PC / Digital Video Input (x2)
	RJ-45	Network Connection (1000BASE-T / 100BASE-TX / 10BASE-T)
	Dsub9 (Control)	RS-232C Connection
	USB Type A	USB Connection
	Wi-Fi ⁹	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n
	Mini Jack (Audio)	Audio Input (x1), Audio Output (x1)
	Mini Jack (Remote)	Wired Remote Control Connection
	Mini Jack (Trigger)	DC 12 V Output

REMOTE CONTROL	Wireless Remote	Infrared
	Scanning Frequency	H: 18.000 kHz – 149.970 kHz, V: 23.956 Hz – 60.000 Hz
IMAGE SIGNALS	HDMI 2.0a (Single)	4096 x 2160 / 3840 x 2160 / 2560 x 1600 / 2560 x 1440 / 2048 x 1200 / 1920 x 1200 / 2560 x 1080 / 2048 x 1080 / 1920 x 1080 / 1280 x 1024 / 1440 x 900 / 1366 x 768 / 1024 x 768 / 1280 x 720 / 800 x 600 / 720 x 576 / 720 x 480 / 640 x 480
	HDMI 2.0a (1 x 2)	3840 x 2400 ^{5,7} / 3200 x 2400 ⁵ / 4096 x 2160 / 3840 x 2160 / 2560 x 1600 / 3840 x 1080 / 2560 x 720 / 1440 x 576 / 1440 x 480 / 1280 x 480
	DVI-D (Single)	4096 x 2160 ^{5,7} / 3840 x 2160 ⁵ / 2560 x 1440 / 2048 x 1200 / 1920 x 1200 / 2560 x 1080 / 2048 x 1080 / 1920 x 1080 / 1280 x 1024 / 1440 x 900 / 1366 x 768 / 1024 x 768 / 1280 x 720 / 800 x 600 / 640 x 480
	DVI-D (1 x 2)	4096 x 2160 ⁵ / 3840 x 2160 ⁶ / 2560 x 1600 / 2560 x 1440 / 2560 x 1080
	DVI-D (2 x 2)	4096 x 2400 ⁵ / 3840 x 2400 ⁵ / 3200 x 2400 ⁵ / 4096 x 2304 ⁵ / 4096 x 2160 / 3840 x 2160
	DVI-D (1 x 4)	4096 x 2400 ⁵ / 3840 x 2400 ⁵ / 4096 x 2304 ⁵ / 4096 x 2160 / 3840 x 2160
	Dot Clock	594.00 MHz (Maximum)
BUILT-IN SOUND	Internal Speaker	5 W, Monaural
LIGHT SOURCE	Type	Blue Laser Diode / Yellow Phosphor
	Life	Up to 20,000 hours ⁸
RATINGS	Fan Noise	37 / 32 / 29 dB ²
	Power Consumption	665 W
	Standby Power	0.8 / 0.4 W ⁹
	Heat Dissipation	Up to 2,270 BTU / h
	Power Voltage	AC 100 – 240 V, 50 / 60 Hz
	Operating Temperature	32°F – 113°F (20% RH – 85% RH)
	Storage Temperature	-4°F – 140°F
	Dimensions (W x H x D) / Weight	22" x 7.9" x 24.5" / 57.3 lbs

*1 When in Presentation Mode. *2 There are three light modes: Normal, Quiet 1 and Quiet 2. The luminance values for modes other than Normal are calculated and are not guaranteed as specifications. *3 When Iris function is set to "Close 3." *4 Air vents should not be blocked. See User Manual for recommended installation. *5 Supported when "Panel drive mode" is set to "4,096 x 2,400." *6 Only low frequencies (24Hz – 30Hz) are supported. *7 EDID is not supported. *8 This is an estimated value, actual hours may vary depending on usage and environment. This is not a guarantee of the life span of individual laser diodes. *9 Network "ON", Standby power setting "Low-power" / Network "OFF."

This document is for information only and the contents are subject to change without notice. Errors and omissions excepted. Images are simulated. Weight and dimensions are approximates. Nothing in this document should be construed as a warranty. Product/Service options, name and availability may vary by region. We expressly disclaim any liability or contractual obligations with respect to this document. Canon, among others, is the trademark of Canon Inc. and/or its affiliates. Other names, marks and logos contained in this document may be the registered trademarks or trademarks of their respective owners.

WHAT'S IN THE BOX

Projector, Lens Cap, Power Cord, Projector Remote Control RS-RC05 (includes two AA batteries), Important Information (Book), User's Manual (CD-ROM), Warranty Card

ACCESSORIES ITEMS

Projector Remote Control RS-RC04, Remote Controller RS-RC05, Replacement Air Filter RS-FL04, Ceiling Attachment RS-CL15, Ceiling Attachment Arms RS-CL17 (Pack of four), Ceiling Extension RS-CL08, Ceiling Extension RS-CL09

Canon Offices

HONG KONG

Canon Hongkong Co. Ltd.
Tel: 852-3191-2388
Fax: 852-2369-3800
www.canon.com.hk

INDIA

Canon India Pvt. Ltd.
Tel: 6124-416-0000 Fax: 124-416-0011
www.canon.co.in

MALAYSIA

Canon Marketing (Malaysia) Sdn. Bhd.
Tel: 60-3-78446000 Fax: 603-7847 7222
www.canon.com.my

PHILIPPINES

Canon Marketing (Philippines), Inc.
Tel: 632-884-9090
Fax: 632-812-0067
www.canon.com.ph

SINGAPORE

Canon Singapore Pte. Ltd.
(Domestic Operations)
Tel: 65-6799-8888 Fax: 65-6798-8882
www.canon.com.sg

THAILAND

Canon Marketing (Thailand) Co. Ltd.
Tel: 02-344-9988 Fax: 02-344-9861
www.canon.co.th

VIETNAM

Canon Marketing Vietnam Co. Ltd.
Ho Chi Minh City Hanoi
Tel: 848-3820-0466 Tel: 844-37711677
Fax: 848-3820-0477 Fax: 844-37711678

Canon Business Partners

BANGLADESH

J.A.N. Associates Ltd.
Tel: 880-2-9660601 Fax: 880-2-8610410

BRUNEI

Interhouse Company Sdn. Bhd.
Tel: 673-2-653001 Fax: 673-2-653003

CAMBODIA

i-Click (Cambodia) Pte. Ltd.
Tel: 855-23-996638 Fax: 855-23-996639

INDONESIA

PT Datenscrip
Canon Call Center
Tel: 021-2922-6000
Fax: 62-21-6544811 to 13
www.canon.co.id

MALDIVES

SIMDI Company (Pvt) Ltd.
Tel: 960-3334421
Fax: 960-3334424

MYANMAR

Myanmar Golden Rock
International Co. Ltd.
Tel: 001-95-1654810 to 654819
Fax: 001-95-1654820

NEPAL

International Electronics
Concern (P) Ltd.
Tel: 977-1-4421991
Fax: 977-1-4421909


PAKISTAN

Shirazi Trading Co. (Pvt) Ltd.
Tel: 92-21-32417737, 32417746
Fax: 92-21-32417747

SRI LANKA

Metropolitan Office (Pvt) Ltd.
Tel: 94-114-700-200
Fax: 94-114-700-398

HDMI 2.0a x 2

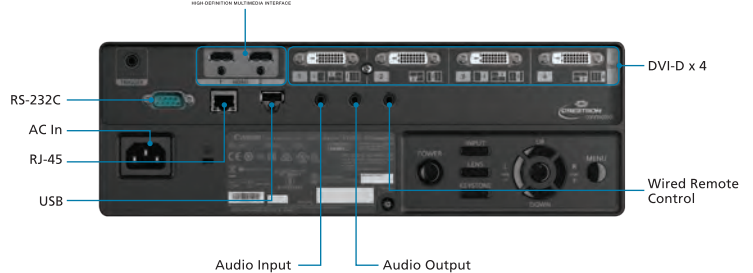

Dealer's Stamp

**SOUTH & SOUTHEAST ASIA
REGIONAL HEADQUARTERS**

CANON SINGAPORE PTE. LTD.

1 Fusionopolis Place,
#15-10 Galaxis, Singapore 138522

www.canon-asia.com

0207W708