

EOS M6

STYLE AND PERFORMANCE PERFECTED

Find the perfect balance of performance and portability in the new EOS M6. Power up your image and video quality with its 24.2 Megapixel APS-C sized CMOS sensor and experience superior autofocusing speed with Dual Pixel CMOS AF.

Dual Pixel CMOS AF

DIGIC 7

24.2 MEGA PIXELS CMOS

FULL HD 60p Recording

9 Frames Per Sec

Tilt-up 180° Tilt-down 45° LCD


Wi-Fi / NFC

Bluetooth

Made in JAPAN



Focusing Speed that Leaves You in Awe

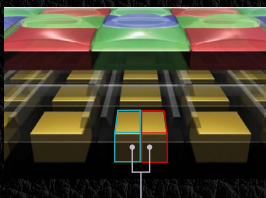

Each effective pixel is comprised of two photodiodes.


From portrait to fast moving subjects, the EOS M6 handles your autofocusing with ease. Equipped with Canon's Dual Pixel CMOS AF, you literally have 24.2 million phase-difference sensors at your disposal for fast and precise focusing. Covering a huge area (80% x 80%) of the focal plane's entire surface, this comprehensive AF system ensures maximum freedom for creative composition.



Optional external viewfinder EVF-DC2, with approx. 2.36 million dots Organic EL display

Brilliant Images That Speak for Themselves

Harnessing the power of DIGIC 7 image processor, the 24.2 Megapixel CMOS sensor produces stunning images with high image clarity and reduced noise level even when shooting handheld night scenes. Normal ISO speed is also expanded to 25600, giving you the flexibility to supplement aperture value change or select a faster shutter speed to capture fleeting moments.

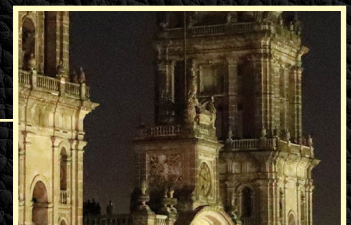



Self Portrait



Panning

Creativity at Your Fingertip

Enjoy a wide variety of creative expression with the EOS M6. Indulge in selfies with the Self-Portrait mode that optimize settings such as skin smoothing and brightness adjustments. The Panning mode provides 3 panning effect levels to help blur the background while freezing the moving subject. If you need to find the right tone to your image, switch to the Creative Assist mode to make adjustments to colour tone, intensity, sharpness, brightness, contrast or even shift to monochrome, all in real-time.

Create Movies That Move You

The EOS M6 produces professional-looking videos with beautiful background blur and low noise. Create popular time-lapse movies with 3 selectable shooting intervals. Touch AF allows for seamless focusing while an array of EF lenses caters for any creative expression. Take advantage of the new Combination IS by combining supported IS lens to provide powerful image stabilization. Even when paired with a non-IS lens, the in-camera image stabilization can function independently to reduce camera shake when shooting movie.



Get Connected with Wi-Fi / NFC / BLUETOOTH®

Conveniently transfer images and videos from the camera to the smart devices via Wi-Fi. You can also upload them directly onto social media platforms from the camera via Canon Image Gateway. The new Bluetooth® low energy technology lets you stay connected to your smart device and allows it to function as a remote control for shooting and playback.



Expand your creative expression with Canon's extensive range of EF-M lenses

- EF-M18-150MM F/3.5-6.3 IS STM ○●
- EF-M15-45MM F/3.5-6.3 IS STM ○●
- EF-M22MM F/2.0 STM ○●
- EF-M18-55MM F/3.5-5.6 IS STM
- EF-M28MM F/3.5 MACRO IS STM
- EF-M55-200MM F/4.5-6.3 IS STM ○●
- EF-M11-22MM F/4-5.6 IS STM

EOS M6 is also compatible with Canon's entire suite of EF, EF-S lenses via the Mount Adapter EF-EOS M



EOS M6 | Specifications

| | |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Image Processor | DIGIC 7 |
| Image Sensor | |
| Type | APS-C CMOS Sensor |
| Image Sensor Size | 22.3 x 14.9mm |
| Effective Pixels | Approx. 24.2 megapixels |
| Lens Mount | EF-M (EF and EF-S lenses compatible via Mount Adapter EF-EOS M) |
| LCD Monitor | |
| Type | 3.0" ClearView II Touchscreen LCD (TFT) 3:2 aspect ratio. Electrostatic capacitive type |
| Effective Pixels | Approx. 1,04 million dots |
| Features | Tilttable 180° up and 45° down |
| Focus | |
| AF Method | Dual Pixel CMOS AF with Face + Tracking AF, Smooth Zone AF, 1-point AF |
| AF Points | Maximum 49 AF points |
| Focus Operation | One-Shot AF, Servo AF |
| Viewfinder | |
| Type | Optional Electronic Viewfinder EVF-DC1 (0.48 type), 4:3 aspect ratio, Approx. 2,360,000 dots, 100% coverage. Optional Electronic Viewfinder EVF-DC2 (0.39 type), 4:3 aspect ratio, Approx. 2,360,000 dots, 100% coverage. |
| Metering System | |
| ISO Speed | AUTO, ISO 100 - ISO 25600 |
| <p>AVAILABLE IN TWO COLOURS</p> | |

| | | |
|-----------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| Shutter | | |
| Shutter Speed | 30 - 1/4000 sec (1/3 stop increments), Bulb (Total shutter speed range. Available range varies by shooting mode) | |
| Flash | | |
| Built-in Flash | Yes | |
| Modes | Auto (E-TTL II), Manual Flash On/Off (3 flash power output settings) | |
| External Flash | E-TTL II with EX series Speedlites, wireless multi-flash support | |
| Shooting Specifications | | |
| Continuous Shooting (Approx.) | 9.0 fps (AF fixed) 7.0 fps (AF tracking) | |
| Still Images: 3:2 | L (Large): | Approx. 24.00 megapixels (6000 x 4000) |
| | M (Medium): | Approx. 10.60 megapixels (3984 x 2656) |
| | S1 (Small 1): | Approx. 5.90 megapixels (2976 x 1984) |
| | S2 (Small 2): | Approx. 3.80 megapixels (2400 x 1600) |
| | RAW: | Approx. 24.00 megapixels (6000 x 4000) |
| Still Images: Aspect Ratios | 3:2, 4:3, 16:9, 1:1 | |
| Movie | | |
| Movie Resolution | Full HD - 1920 x 1080 HD - 1280 x 720 VGA - 640 x 480 | |
| Dimensions | 112.0(Width) x 68.0(Height) x 44.5 mm(Depth) | |
| Weight (CIPA compliant testing standard, including battery and memory card) | Approx. 390 g | |
| Network | Wi-Fi / NFC / Bluetooth® | |
| Optional Accessories | Body Jacket EH30-CJ Neck Strap EM-E2 | |

Insist on an original warranty by your sales office. Specifications are subject to change without notice. Images are simulated.

0206W394